JCD 杰创达

CH200High-Speed Scanner

Manual

CONTENTS

Chapter I Introduction 3
1.1 Package contents 3
1.2 Appearance 3
1.3 Recommended configuration 3
1.4 Product functions, parameters and application 4
1.4.1 Functions 4
1.4.2 Parameters 4
1.4.3 Applications 5
Chapter II Installation 6
2.1 Structural drawing 6
2.2 Software CD 6
2.3 Driver Installation 7
2.4 Software Installation 14
Chapter III Software Interface Instruction 18
3.1 Application 18
3.2 Menu 19
3.2.1 File 19
3.2.2 Edit 21
3.2.3 View 22
3.2.4 Snapshot 23
3.2.5 Image 24
3.2.6 Effect 26
3.2.7 Tool 29
3.2.8 Help 30
3.3 Tool Information 30
Chapter IV Common problems and use skills 32
Chapter V Errors, solutions and notes 34

Service information

Network services

You can get technique support and related information though our company website and telephone.

After-sales insurance notes

1、 All the after-sales policy complies with the stipulation of "three packages".

2、 Maintenance service is non-freight, charge retails and overhauling programs by next year.

3、 When the products are sent to repaired, total package is demanded to ensure the quality of maintenance.

4、 Non-warranty scope

- The damage is made by irresistible disease such as natural disease.
- Personal factors.
- Improper use.
- Problems and error made by other software of installation and design.
- Computer virus.
- One that tear original warranty serial number card or non-serial number card will cancel his rights of maintenance and not provide maintenance.

5、 If the adverse products are generated by factors of non-warranty scope, we'll charge under the standard required by company, which has nothing to do with warranty years.

6、 The warranty scope is only for the product itself without joint maintenance responsibility for supplies.

7、 During repairing, our company is not responsible for the interests of purchaser and potential damage in foreseeing circumstances.

Suggestion for use

The effect is better under the environment of adequate lighting.

Contact:

Chapter I Introduction

1.1 Package contents

（1） High-Speed Scanner
（2） High-Speed Scanner Special manuscript desk
（3） CD-ROM（ including driver programs, operation instructions and application procedure）
（4） Cable for USB 2.0
（5） Instruction for user
（6） Yardstick

If above package accessories are incomplete, please contact with your dealer or company to ensure your interests.

1.2 Appearance

Fold

Open

1.3 Recommended configuration

（1） Hardware： Pentium 4 or the level of CPU or higher, 512MB or higher memory, CD-ROM.
（2） USB 2.0 connector.
（3） Operation system: Windows 2003、Windows XP、Windows 7.

1.4 Product functions, parameters and application

High-Speed scanner is portable document photography facility. Whatever, such as paper files, color picture or three-dimensional objects, it can scan and store easily. It adopts special folding design, the appearance is simple, noble, generous and stable. When scanning, documents and objects will not touch with it, so that cardboard phenomenon found in traditional scanner is avoided, the high-definition display and storage of video files will meet the demand for document management. With it, you can get access to valuable video data at your own will. It provides more functions and has wider application than usual traditional scanner.

1.4.1 Functions

（1）Duplicator

It can get quickly access to paper files, video files,etc,and can print at real time through black and white or colored duplicator, provide files video photocopy simultaneously .It's free to set the size and angle of rotation ,which can also copy books.

（2）Physical objects projector

Documents photography is a vertical scanning design ,which can take place under lens, capture graphics at real time, and project to screen directly if harmony with software.

（3）physical objects scanner

Scanning induct components with mechanical design, it’s convenient to scan objects, which can preserve data. At the same time, it can scan continuously, and time and space will be free.

（4）Video

Besides providing the function of scanning papers files and objects, it provide video at random, operate simply and time of video is free.

（5）Scanning and preserving for A4 files

Documents photography adopt interface in USB2.0,transmission speed comes to 480MB/S,2 million pixels HD lens, provide high quality of scanning ,maximum size comes to A4,and provide cropping in dealing with pictures ,this way could save space of documents reserving.

（6）E-mail

The video files scanned and reserved by documents photography are able to be sent anywhere.

（7）Image processing

It attaches powerful image processing software arbitrarily. which can add words to video files ,cut pictures, tilt correction ,rotate pictures at arbitrary angle, filtering can eliminate the stain and impurity, etc. It is able to make OCR identification to words and form, which can transform picture file into edited text file.

1.4.2 Parameters

Product Model	CH200
Product Appearance	Telescopic folding portable
Scan Type	Documents, Bill of Documents, Identity Card, Notes, Pictures, Photographs, Magazines and Books, Three-dimensional Object etc.
Scan Size	A4, A5, A6, A7, Calling Card, Identity Card
Scan Speed	1 Second per-time
Resolution	1600×1200
Image Color	24 Bit
Image Format	JPEG, GIF, BMP, TIF, etc.
Connector	USB 2.0 Communicate and Power-on
Image Control	Brightness adjustment, Saturation adjustment, Exposure value adjustment, Sharpness adjustment, Color adjustment, Gain control, ect.
Light	Natural Light and LED light source
Weight	550g
Other Features	OCR(Optical Character Recongnition), DV video Recording
System Requirements	P4 or equivalent CPU, 512M above, built-in USB 2.0 host adapter or external plug USB 2.0 adapter, MS Direct9.0 above
Operating System	Windows 2003 、 Windows XP 、 Windows 7
Light Control	5 degree Touch-Light Regulation
Product Function	Document Scanning, Video, Eyes-Protection Lamp

1.4.3 Applications

（1） As portable photography, it proceeds daftly digital scanning of paper file or other objects everywhere.

（2） As camera, it proceeds video scanning.

（3） Realize photocopying by combining computer and printer.

（4） object scan function concert with projector to show video

Chapter II Installation

2.1 Structural drawing

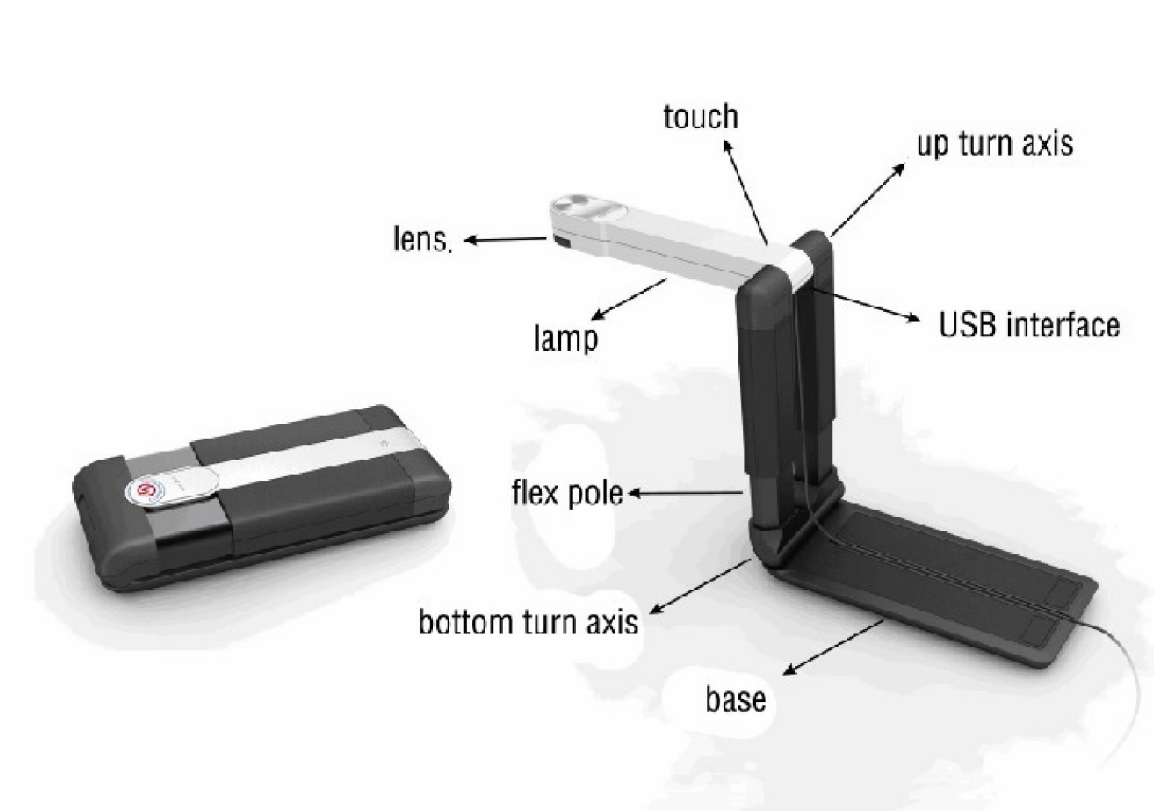

2.2 Software CD

Put High-speed scanner software CD into the drive, it will read automatically, pop-up installation window with six buttons: Driver, Software, Fax, Infor, Scan, Exit, with Chinese and English language choices.

2.3 Driver Installation

Choose “Driver” button to install driver for High-Speed Scanner, please confirm that High-Speed Scanner is connected with the computer before installing.

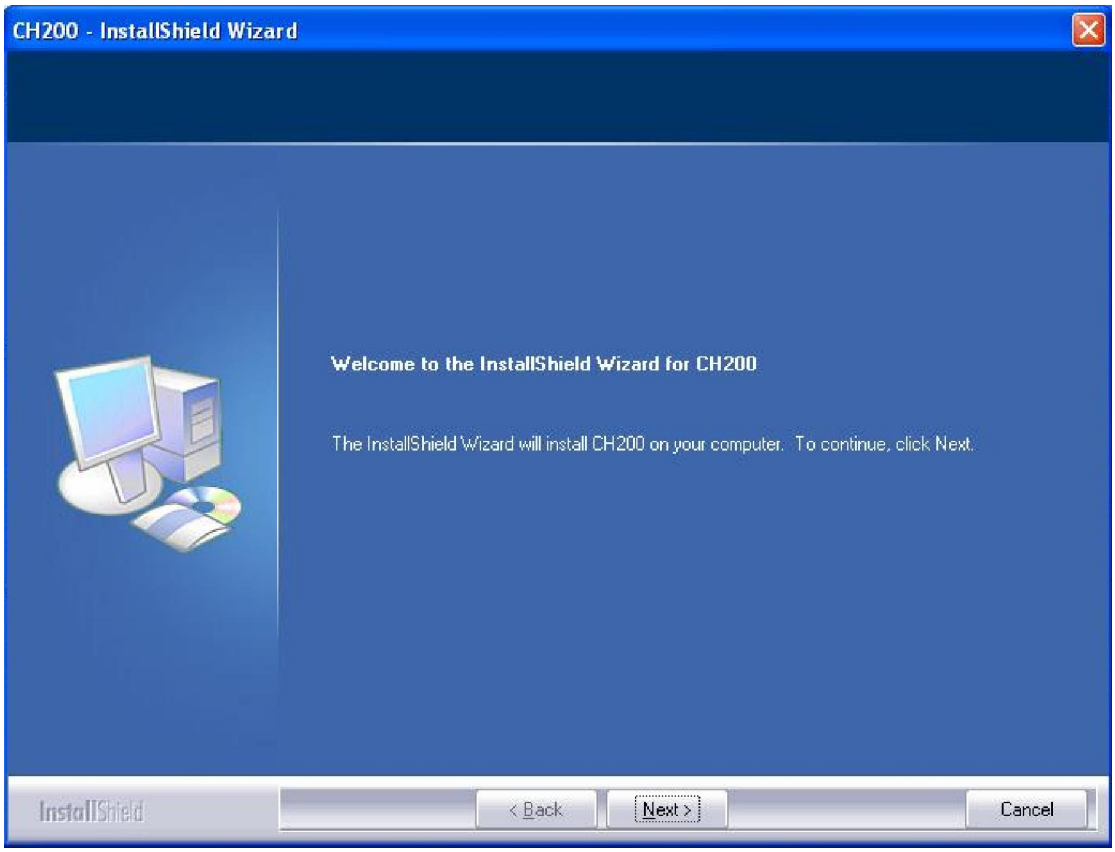
CH200 - InstallShield Wizard
Welcome to the InstallShield Wizard for CH200
The InstallShield Wizard will install CH200 on your computer. To continue, click Next.
InstallShield
< Back
Next >
Cancel

Choose “next”:

If appear with the follow form, please insert High-Speed Scanner to USB interface, and then choose “Yes”.

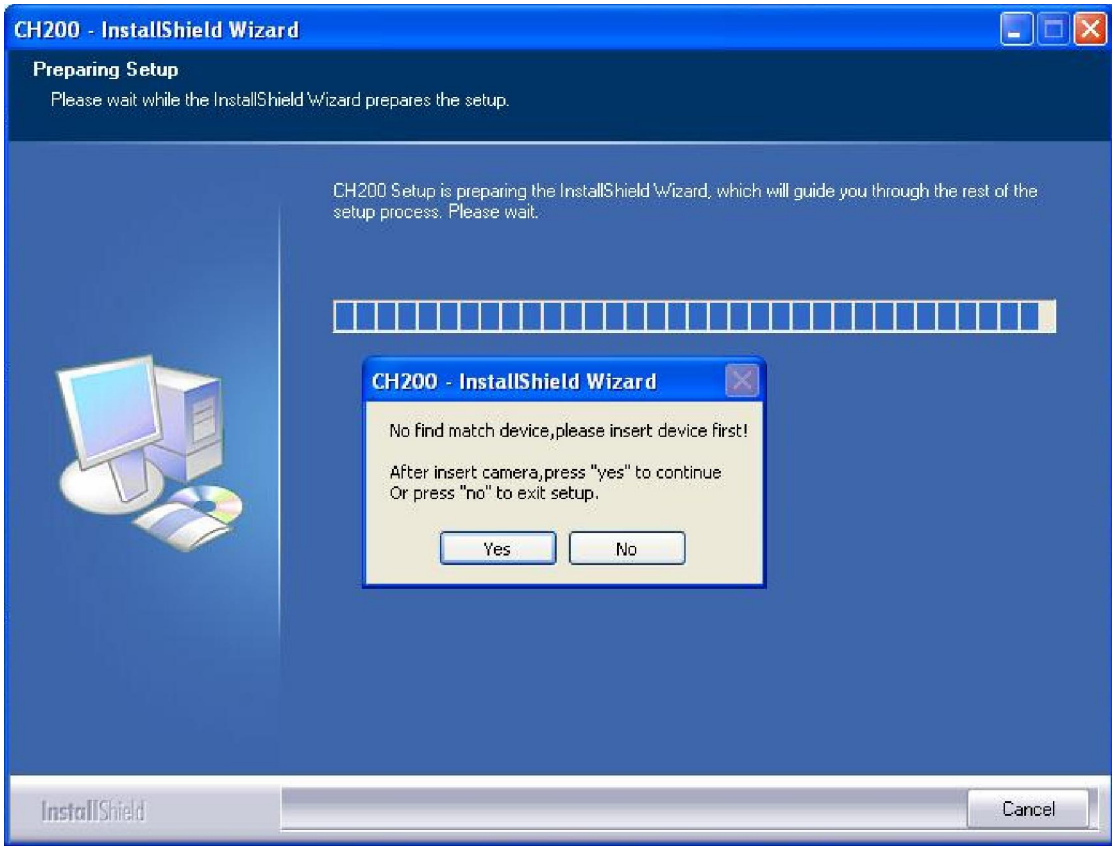
CH200 - InstallShield Wizard
Preparing Setup
Please wait while the InstallShield Wizard prepares the setup.
CH200 Setup is preparing the InstallShield Wizard, which will guide you through the rest of the setup process. Please wait.
CH200 - InstallShield Wizard
No find match device,please insert device first!
After insert camera,press "yes" to continue
Or press "no" to exit setup.
Yes
No
InstallShield
Cancel

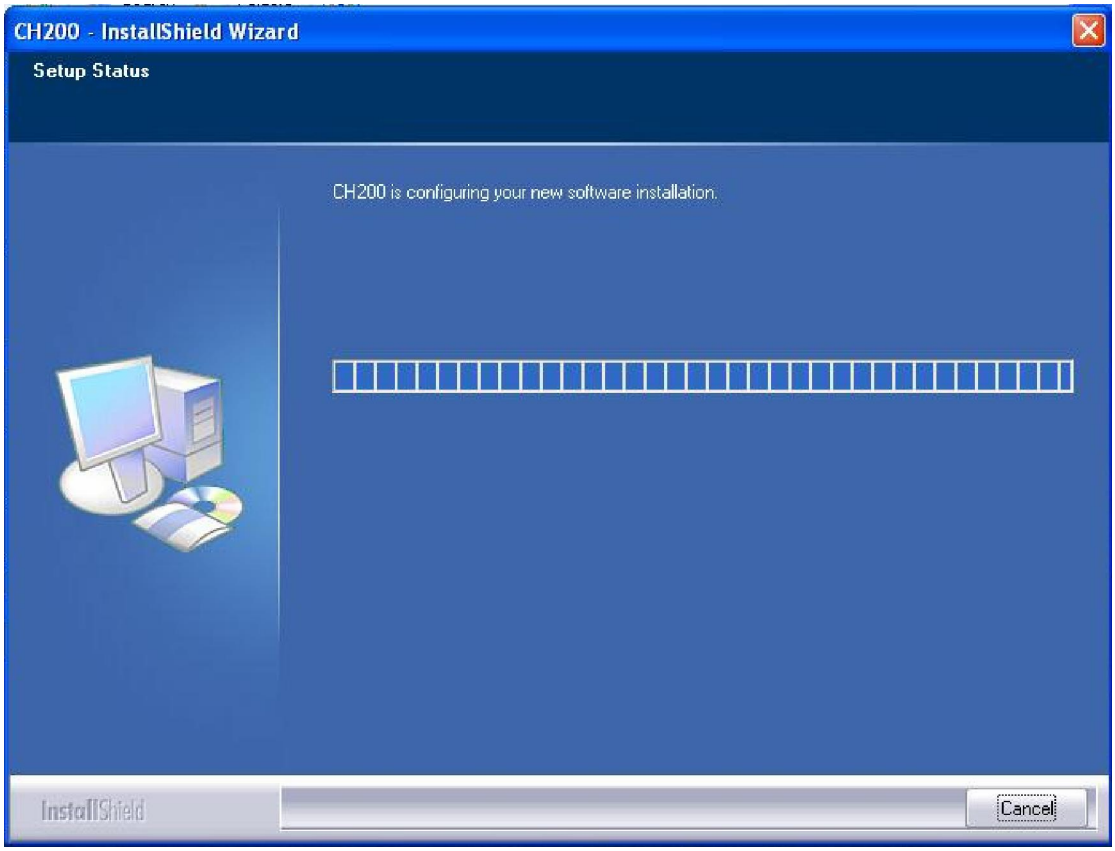

Driver is installing automatically.

If appear with the follow form, please choose “continue anyway”.

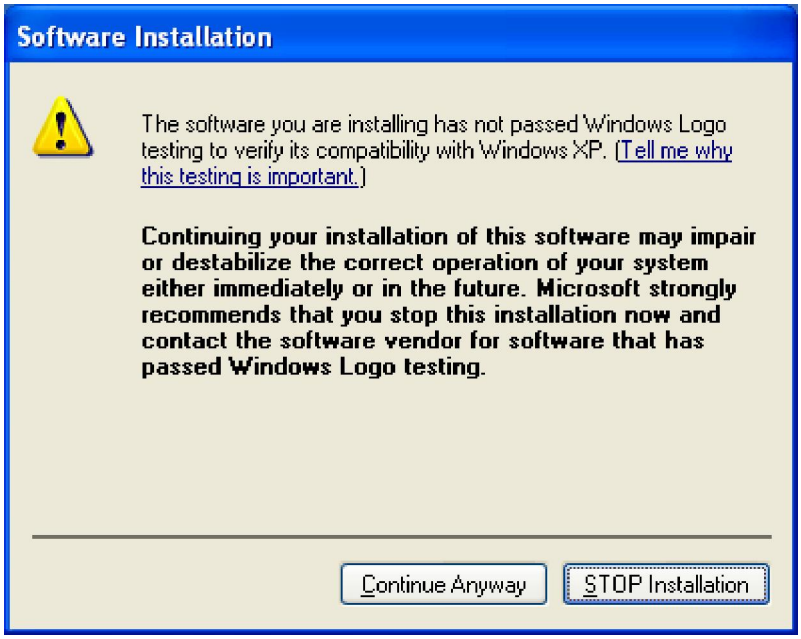
Software Installation
The software you are installing has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the software vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

If appear with the follow form, please choose “continue anyway”.

Hardware Installation
The software you are installing for this hardware:
CH200
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

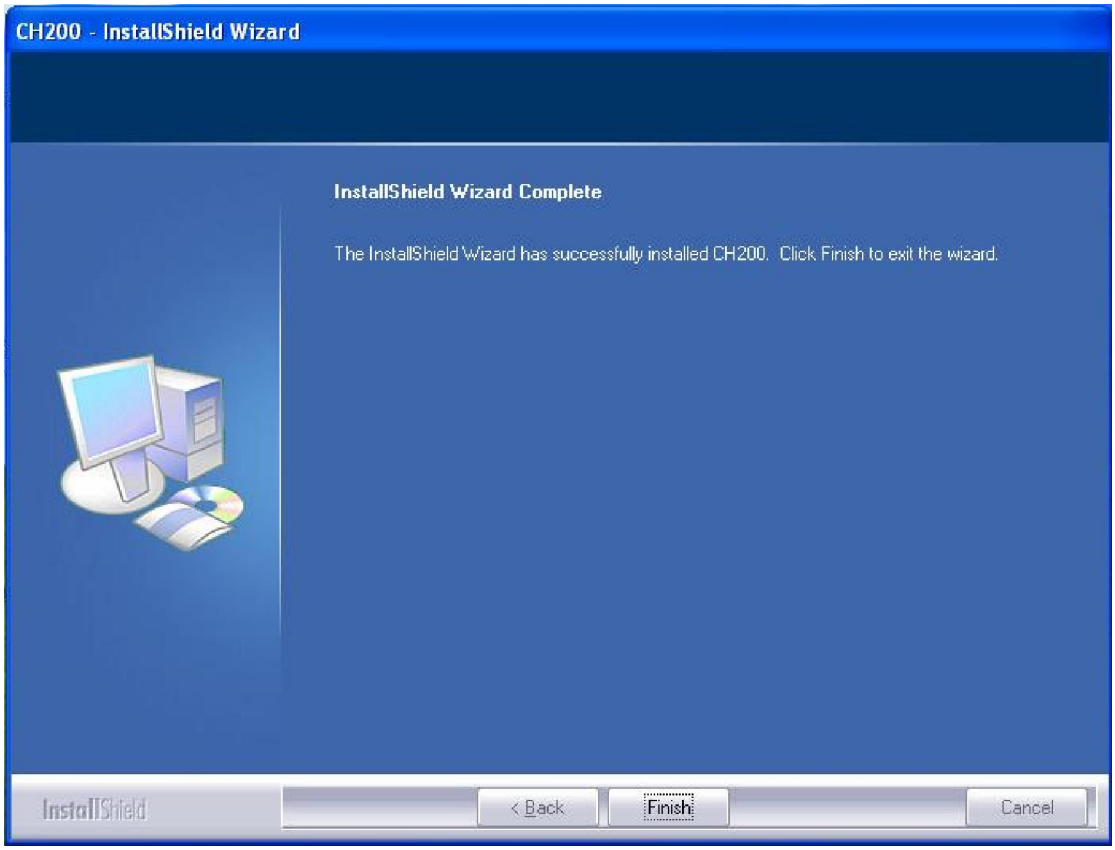

Choose “finish” to finish installation. After installation, please remove the facility before pull in it again.

Windows XP driver update

After driver installation, the follow hardware update form will pop up automatically.

Hardware Update Wizard
Welcome to the Hardware Update Wizard
This wizard helps you install software for:
CH200
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

Choose “Install from a list or specific location (Advanced)”, choose “next”.

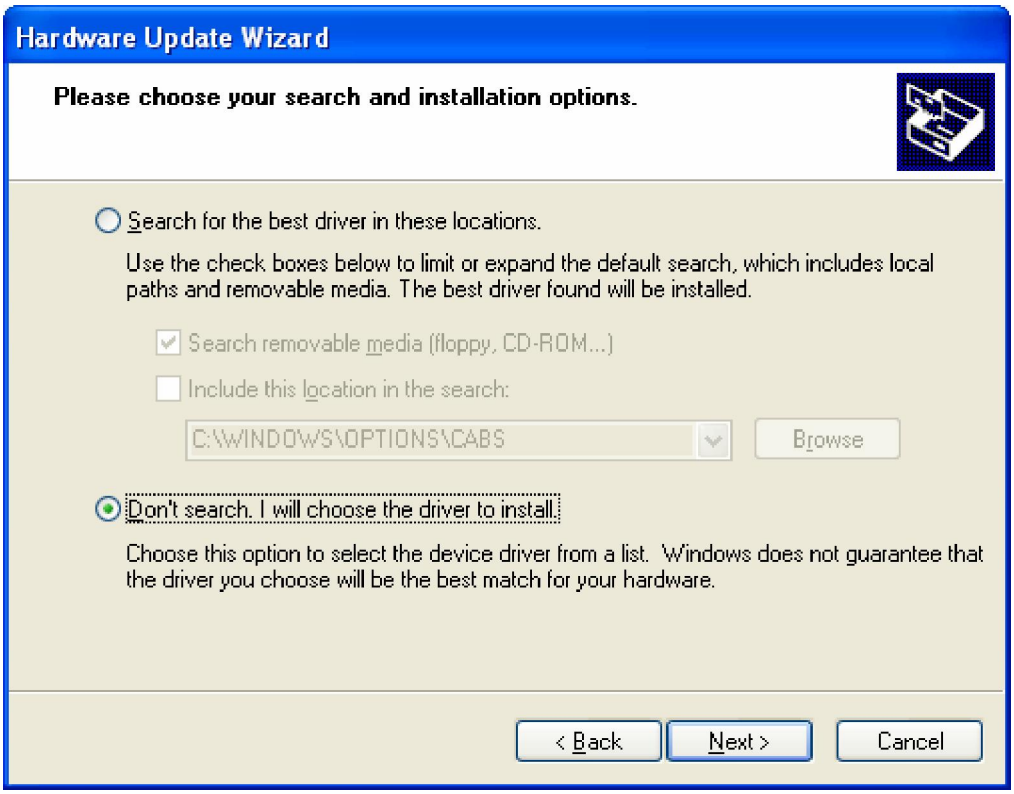
Hardware Update Wizard
Please choose your search and installation options.
Search for the best driver in these locations.
Use the check boxes below to limit or expand the default search, which includes local paths and removable media. The best driver found will be installed.
Search removable media (floppy, CD-ROM...)
Include this location in the search:
C:\WINDOWS\OPTIONS\CABS
Browse
Don't search. I will choose the driver to install.
Choose this option to select the device driver from a list. Windows does not guarantee that the driver you choose will be the best match for your hardware.
< Back
Next >
Cancel

Choose “Don’t search, I will choose the driver to install”, choose “next”.

Hardware Update Wizard
Select the device driver you want to install for this hardware.
Select the manufacturer and model of your hardware device and then click Next. If you have a disk that contains the driver you want to install, click Have Disk.
Show compatible hardware
Model
USB Video Device
CH200
This driver is not digitally signed!
Tell me why driver signing is important
Have Disk...
< Back
Next >
Cancel

Choose “CH200” and “next”.

If appear with the follow form, please choose “continue anyway”.

Hardware Installation
The software you are installing for this hardware:
CH200
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

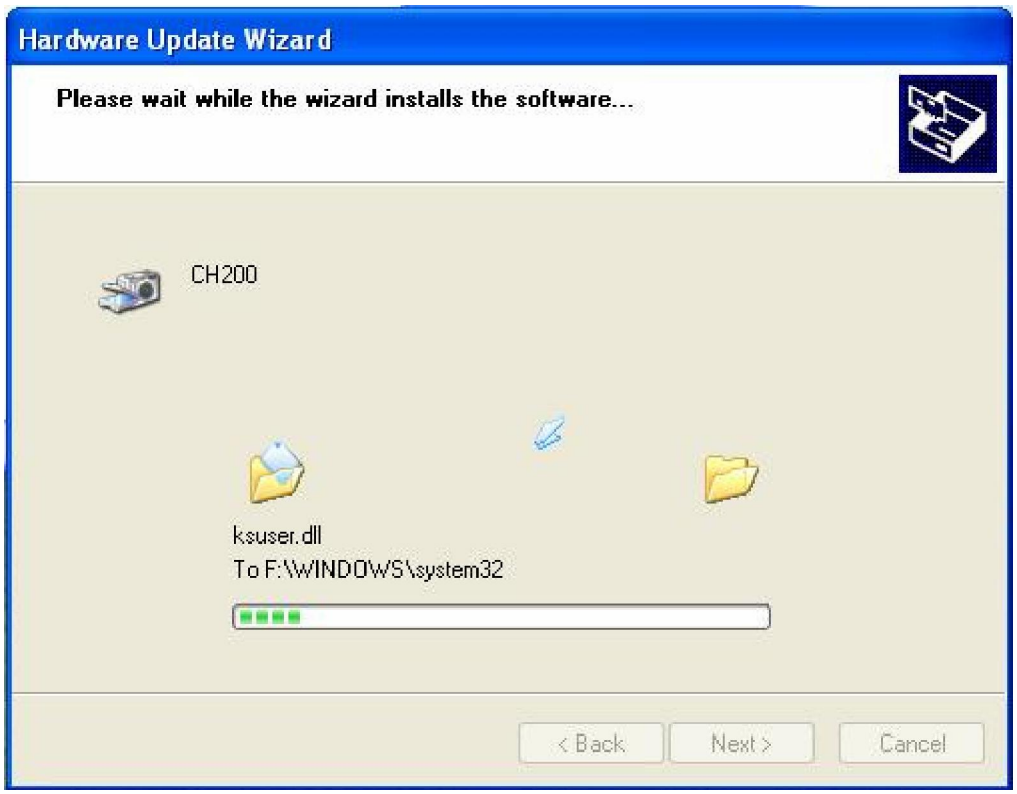

The drive is update automatically.

Hardware Update Wizard
Completing the Hardware Update Wizard
The wizard has finished installing the software for:
CH200
The hardware you installed will not work until you restart your computer.
Click Finish to close the wizard.
< Back
Finish
Cancel

Choose “finish” to finish update driver.

2.4 Software Installation

Press “Software” button to install software.

COPROMETRO CH200 Setup
Welcome
Welcome to the installer for COPROMETRO CH200 1.0.
It is strongly recommended that you exit all Windows programs before continuing with this installation.
If you have any other programs running, please click Cancel, close the programs, and run this setup again.
Otherwise, click Next to continue.
< Back
Next >
Cancel

Choose “next”.

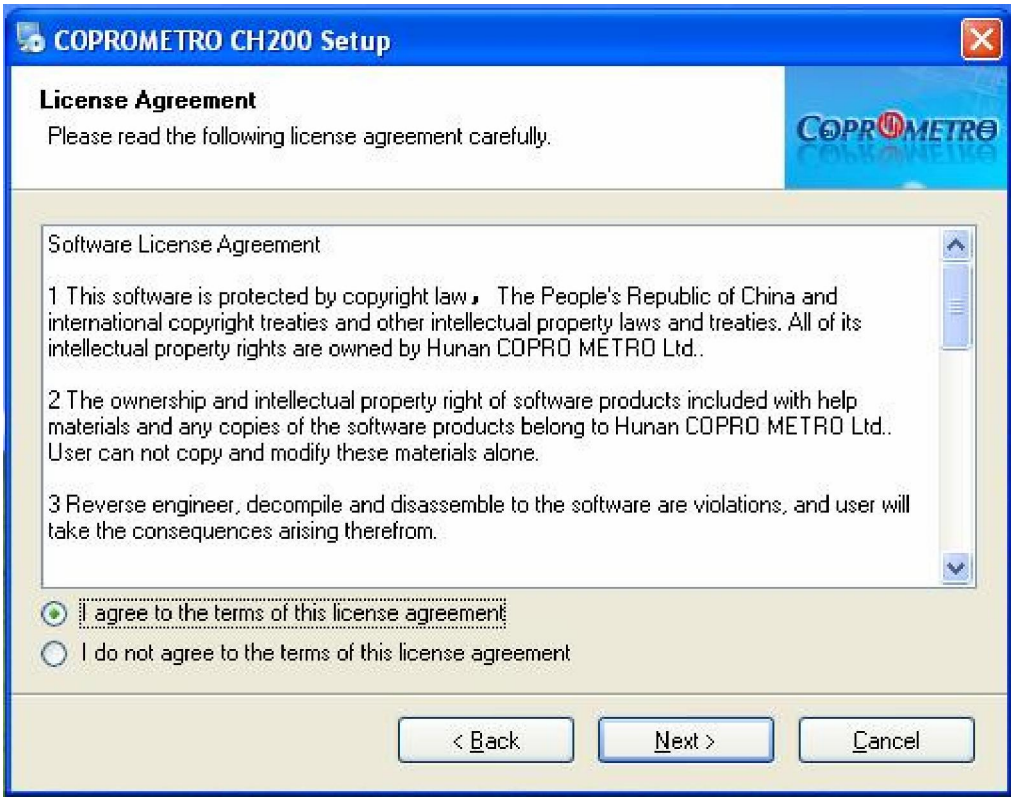
COPROMETRO CH200 Setup
License Agreement
Please read the following license agreement carefully.
Software License Agreement
1 This software is protected by copyright law， The People's Republic of China and international copyright treaties and other intellectual property laws and treaties. All of its intellectual property rights are owned by Hunan COPRO METRO Ltd..
2 The ownership and intellectual property right of software products included with help materials and any copies of the software products belong to Hunan COPRO METRO Ltd.. User can not copy and modify these materials alone.
3 Reverse engineer, decompile and disassemble to the software are violations, and user will take the consequences arising therefrom.
I agree to the terms of this license agreement
I do not agree to the terms of this license agreement
< Back
Next >
Cancel

Choose “I agree to the terms of this license agreement” and “next”.

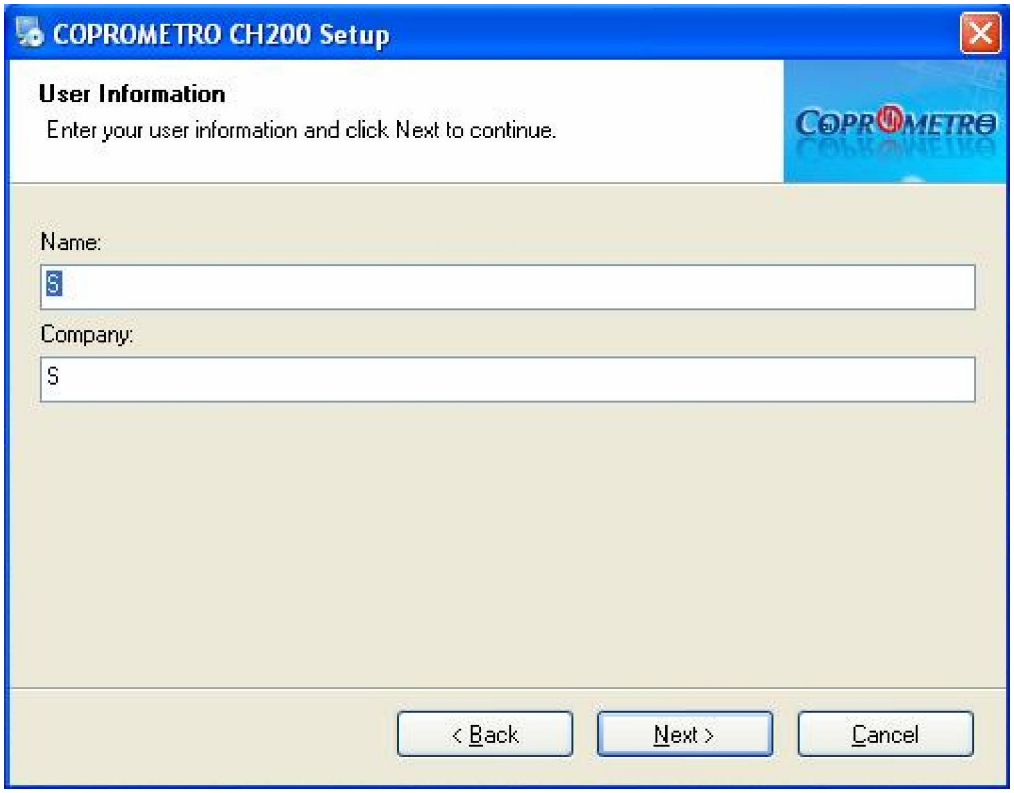

Input user information or with the default information, choose “next”.

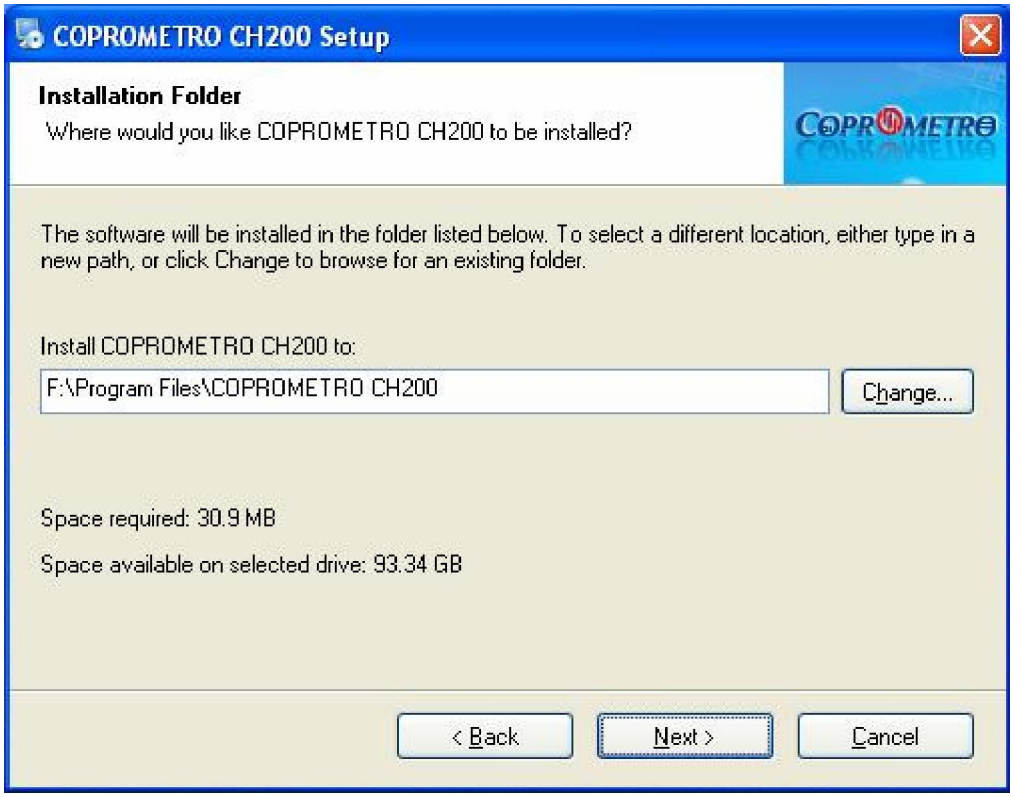
COPROMETRO CH200 Setup
Installation Folder
Where would you like COPROMETRO CH200 to be installed?
The software will be installed in the folder listed below. To select a different location, either type in a new path, or click Change to browse for an existing folder.
Install COPROMETRO CH200 to:
F:\Program Files\COPROMETRO CH200
Change...
Space required: 30.9 MB
Space available on selected drive: 93.34 GB
< Back
Next >
Cancel

Choose install path or with the default path, choose “next”.

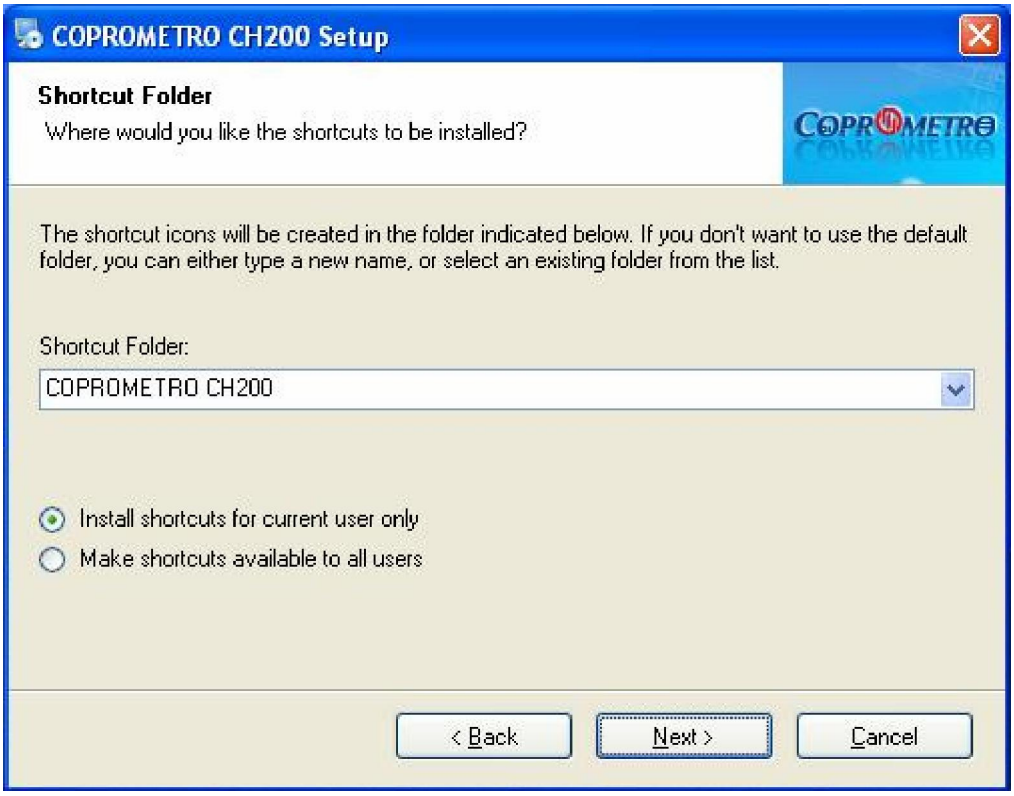
COPROMETRO CH200 Setup
Shortcut Folder
Where would you like the shortcuts to be installed?
The shortcut icons will be created in the folder indicated below. If you don't want to use the default folder, you can either type a new name, or select an existing folder from the list.
Shortcut Folder:
COPROMETRO CH200
Install shortcuts for current user only
Make shortcuts available to all users
< Back
Next >
Cancel

Prepare to install, “next” to continue.

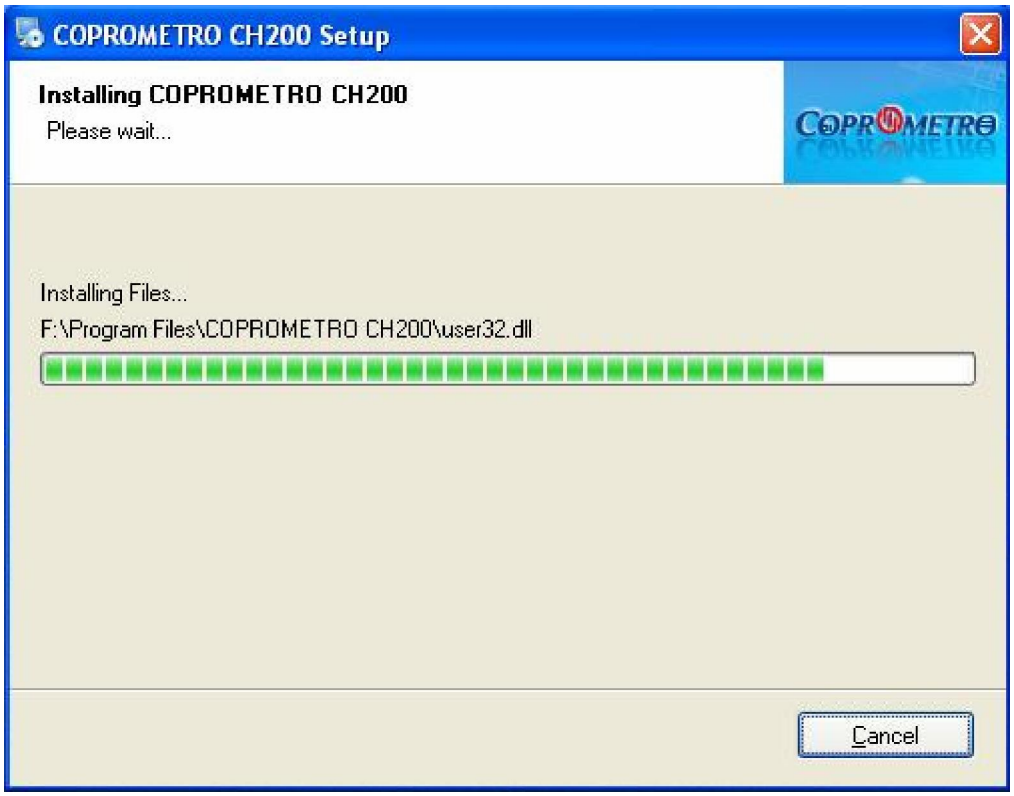

It is installing, please wait…

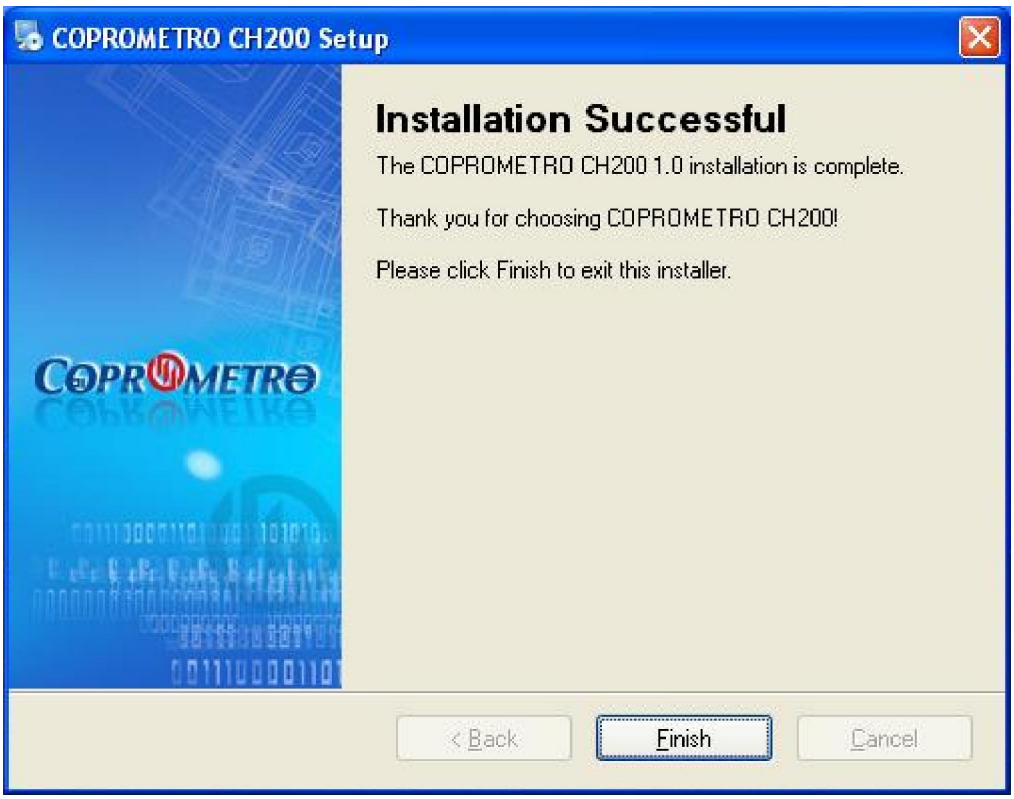

Choose “finish” to finish installation.

Chapter III Software Interface Instruction

3.1 Application

（1）Open application form，double-click the shortcut “COPROMETRO CH200” on desktop, or click "Start-All programs- COPROMETRO CH200- COPROMETRO CH200 ".

（2）Display the interface of software

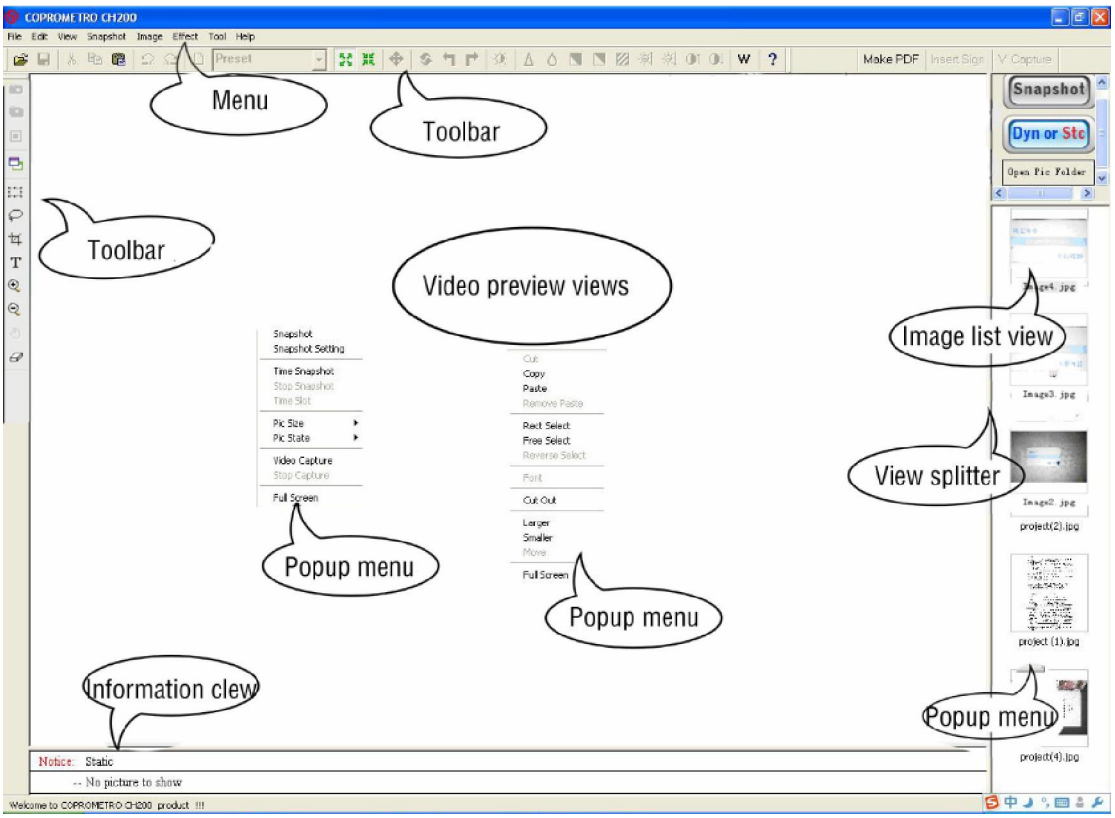

This software interface are mainly divided into: the title bar, the menu , toolbar, image list view, video preview view, photo editing view, text views, the status bar, popup menu and view splitter.

Menu

All the functions of the software can be found in the menu

Toolbar

It is the shortcut of the menu , user can enhance operational efficiency through using the icons displayed on the toolbar.

Information clew

Clew the real-time operation and relative information.

Image list view

Display all the pictures of the current Settings folder and user can open, or delete the pictures

displayed in the image list view. The number of list can be operated by user.

Video preview views

Preview the video capture from the business scanner. Display the actual effect after editing the picture.

Popup menu

Displayed partial menus witch can be used currently

View splitter

It can adjust the size of the view.

3.2 Menu

3.2.1 File

File menu usually use for existing file operations, including: new, open, save, save as, Send Email, print setup, print preview, printing (1:1), print and exit these functions.

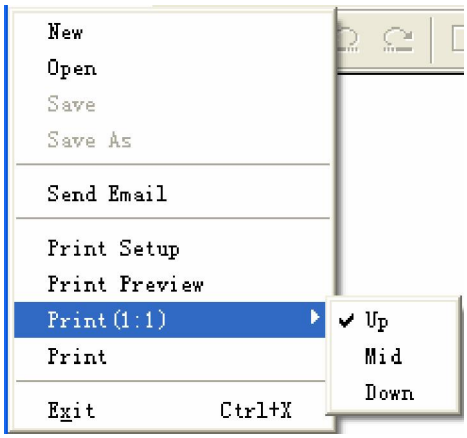

New

New a blank document, in it image can be pasted and operated.

Open

Open the picture file existing in computer; it can precede several of format picture files which support this system, while others can not make it.

Save

Save the image displayed on image view after editing, the filename, file formats, and the file path are same as the original ones.

Save as

Save the image displayed on image view after editing, the filename, file formats, and the file

path can be modified.

Send Email

Open the web site which user use to send an E-mail. Remember to write the web site in the setting dialog.

Print Setup

Choose the printer that has been installed in the computer, it should be set up before printing or printing preview.

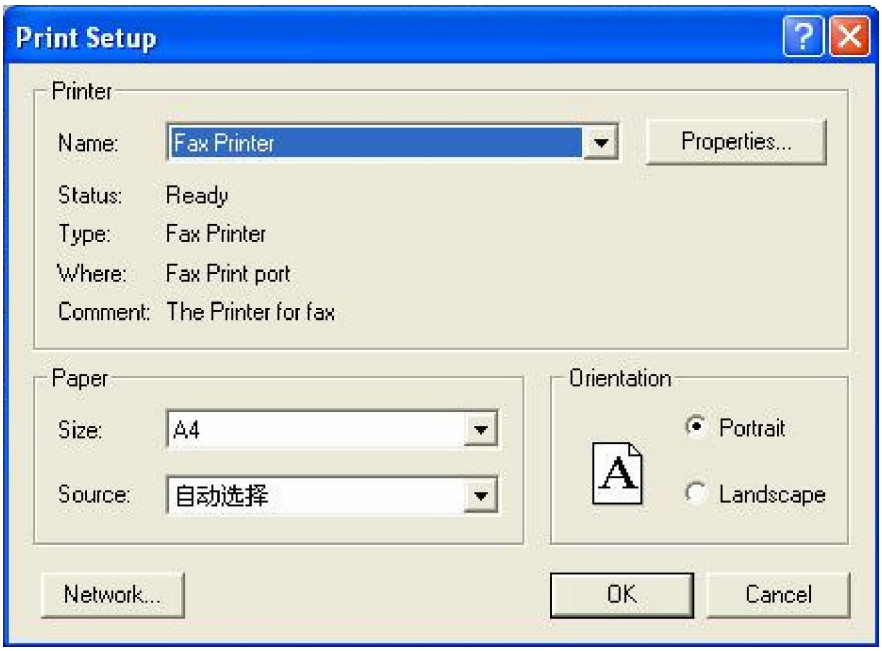

Print preview

Look over the image before printing. Different printers with different preview results, it has to print setup before preview. And the picture got from scanning needing to rotate 90 before preview and print.

Print (1:1)

Check the Print (1:1) menu item, and then print the image, the size that printed on the paper will be same as the object. This menu has up, mid and down three choices according to three scan heights. So to get the right print result, you must choose right menu and the print picture must be got with our facility.

Print

Print the image displayed on image view by the printer on the computer.

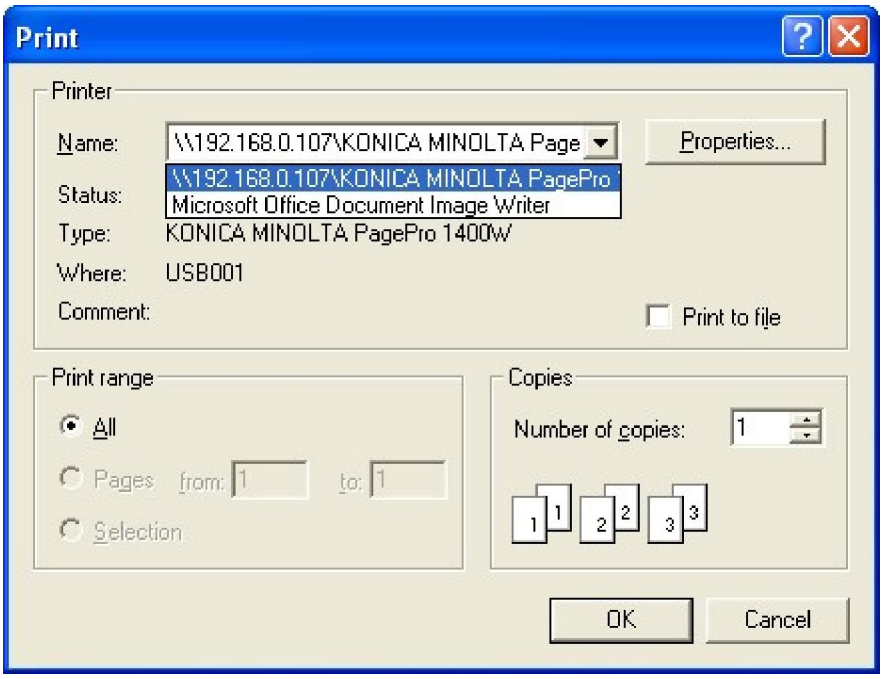

Exit

Exit when user finishes using the software.

3.2.2 Edit

It includes Undo, Redo, Cut, Copy, Paste, Eraser, Text, Font, Cut Out, Delete, etc.

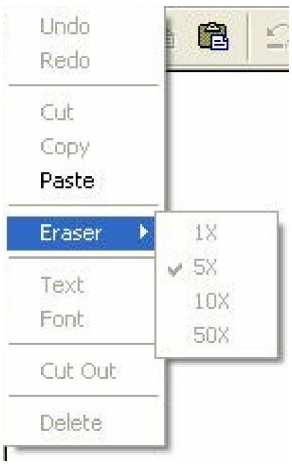

Undo

Back to the last step of edit operation.

Redo

Go to the next step of edit operation.

Cut

Remove selected part of the picture.

Copy

Copy a part or the whole picture.

Paste

Paste the clipboard data.

Eraser

Remove picture information with width 1, 5, 10 or 50.

Text

Add text in the picture. At the location wanting text, press left-button to get one edit-box to input text. Press left-button out of the edit-box to finish this operation.

Font

Set text font for adding text to the picture.

Cut Out

Remove unselected part of the picture.

Delete

Delete the opened picture.

3.2.3 View

It includes Full Screen, Actual Size, Frame Size, Move, Dynamic or Static, Rearrangement, etc.



Full Screen

Only show `Video preview views` without menu, toolbar, status bar, information clew and image list view.

Actual Size

Show the video and picture with their actual size.

Frame Size

Show the video and picture with frame size and at the same time the proportion of image height and width is changeless.

Move

Move the image if user want to see the different part of the image.

Dynamic or Static

Show the image view and hide the video view, or show the video view and hide the image view.

Rearrangement

Restitute window to default state.

3.2.4 Snapshot

It includes Snapshot Setting, Snapshot, Time Snapshot, Stop Snapshot, Digital Zoom, Video Capture, Stop Capture, etc.

Snapshot Setting

It provides settings of picture size, picture state, picture format, picture naming, auto threshold, auto ground color removal, auto add snapshot time, auto gray scale, time internal of time snapshot, JPG quality, and save path, etc. And also auto threshold and auto ground color removal can be previewed. Choose this menu item, you will get the follow dialog.

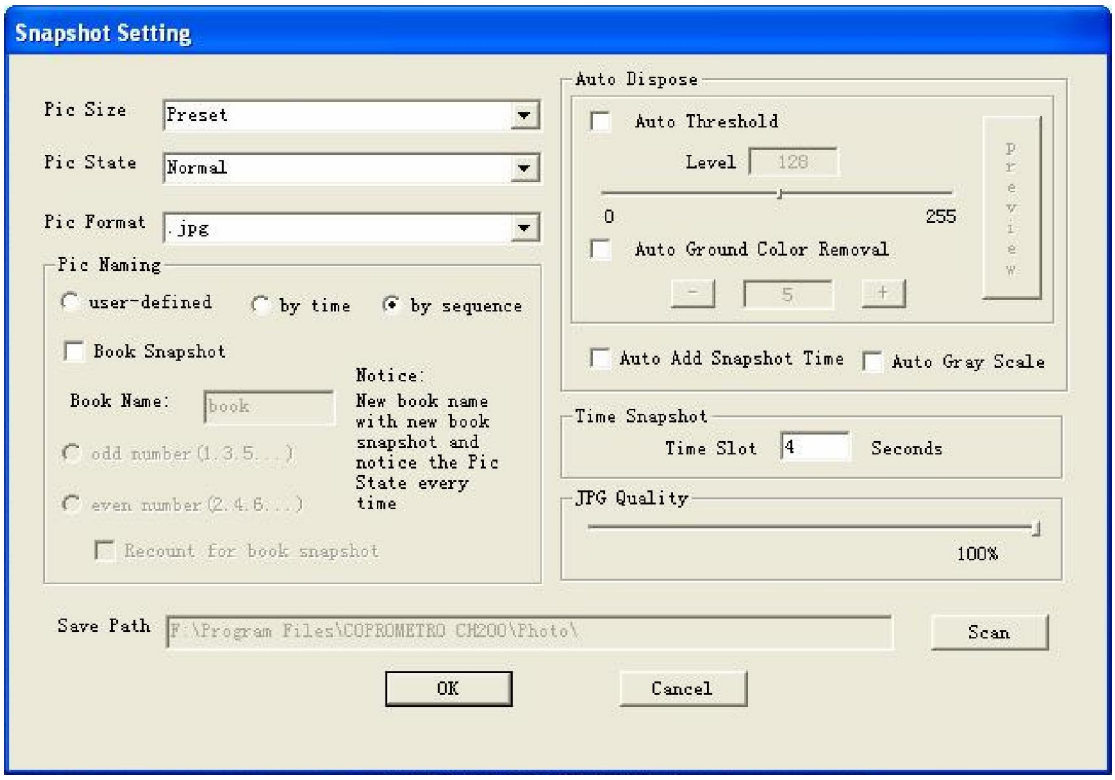

Snapshot

Scan an image for the video preview.

Time Snapshot

Scan automatically according to the interval.

Stop Snapshot

Stop the scan which make by the "Start Scan".

Digital Zoom

With this, the video can be zoomed in, it has six steps.

Video Capture

Start recording the video.

Stop Capture

Stop recording the video.

3.2.5 Image

It includes Rotate left 90, Rotate Right 90, Rotate, Larger, Smaller, Resample, Rect Select, Free Select, Reverse Select and Correction.

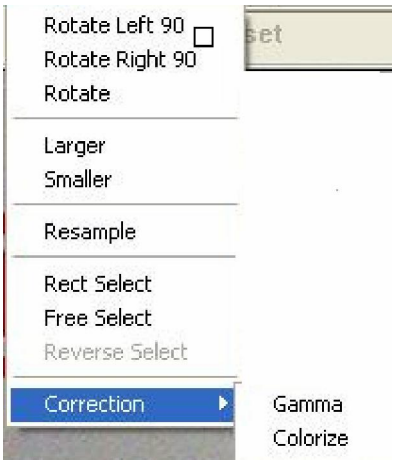

Rotate Left 90

Rotate the image for counter-clockwise with 90 degrees.

Rotate Right 90

Rotate the image for in clockwise with 90 degrees.

Rotate

Rotate the image for in clockwise or counter-clockwise with any degree.

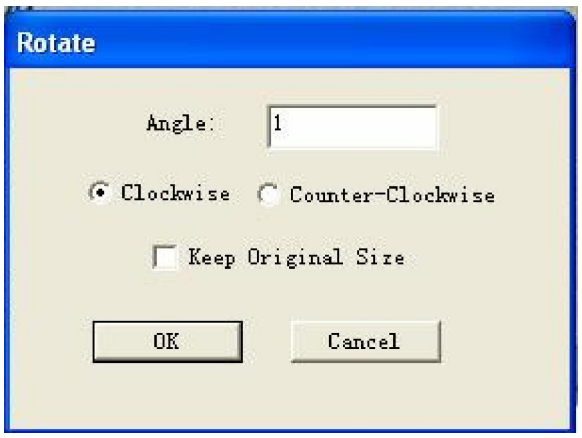

Larger

Display the image with a smaller scale.

Smaller

Display the image with a bigger scale.

Resample

Change the actual size of the image. Click the menu item, the resample dialog will be shown.

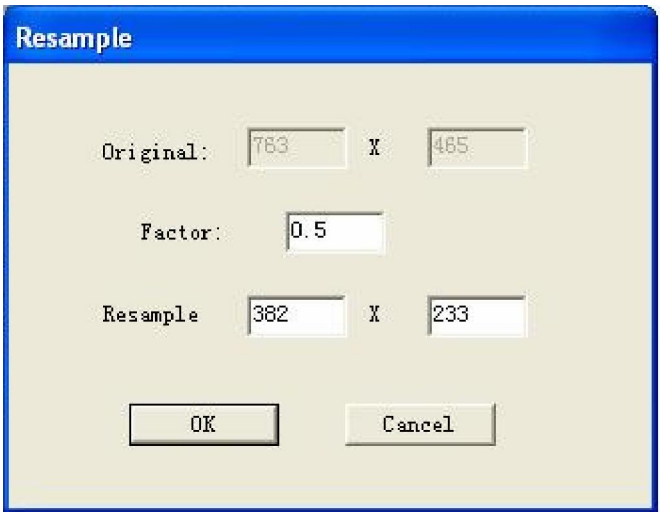

User can choose to change the image size factor or change directly the image height or width, and choose different interpolation approach.

Rect Select

Select one rectangle area in the image.

Free Select

Select one un-regular area in the image.

Reverse select

Reverse select the unselected area by rect select or free select.

Gamma

Though the gamma values may differ for input and output devices to accommodate the difference between scene lighting and lighting of the viewing environment.

Colorize

Adds color to a grayscale image converted to RGB, or adds color to an RGB image-for example, to make it look like a duotone image by reducing its color values to one hue.

3.2.6 Effect

It includes some operation to picture.

Negative

Image displays dark areas as light and light areas as dark.

Emboss

Make increasing pattern on the surface of image.

Edge

Reserve the edge of the image.

Threshold

The Threshold effect converts grayscale or color images to high-contrast, black-and-white images. Specify a certain level as a threshold; all pixels lighter than the threshold convert to white and all pixels darker convert to black.

Gray scale

Make the image into colors which mix the black and white, like the colors of ash.

Ground Color Removal

Remove the ground color.

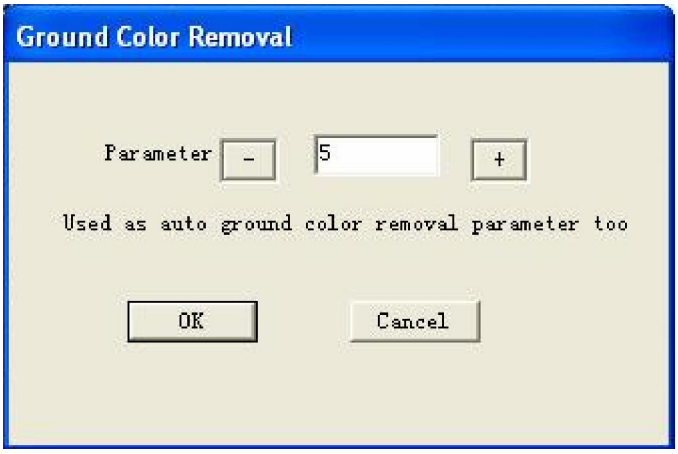

Noise Removal

Remove the noise of image.

Remove Red Eye

Remove the red eye of the people in the image after select the eye.

Dilate

To make the edges in the image become bigger than before.

Erode
To make the edges in the image become smaller than before.

Blur
Make the image less clear in different part.

Sharpen
Enhanced image edge effect, so it will has more obvious edges.

Soften
To make the whole image more gentle.

Lighten
Increase the value of a pixel in the image.

Darken
Reduce the value of a pixel in the image.

More Contrast
Increase the contrast of the image.

Less Contrast
Reduce the contrast of the image.

More Saturation
Increase the saturation of the image.

Less Saturation
Reduce the saturation of the image.

3.2.7 Tool

It includes video format, video attribute, audio format, make PDF, make signature, insert signature and optical character recognition, etc.

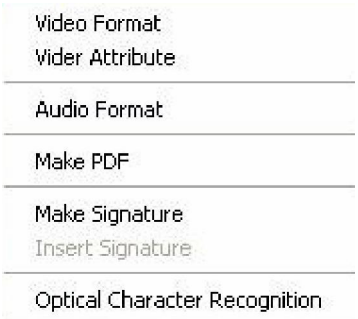

Video Format

To choose the color space compress format， output image size and frame frequency.

Video Attribute

Set video light, contrast, saturation, etc.

Audio Format

Set parameters of microphone.

Make PDF

Convert pictures to PDF document.

Make Signature

Make signature picture and encode it.

Insert Signature

Decode signature file and insert it to the right location.

OCR

Optical Character Recognition, recognize the text in the image. Note: you must install OCR software to use the function.

3.2.8 Help

About CH200

Show information about this software.

User Manual

Show the user manual document.

3.3 Tool Information

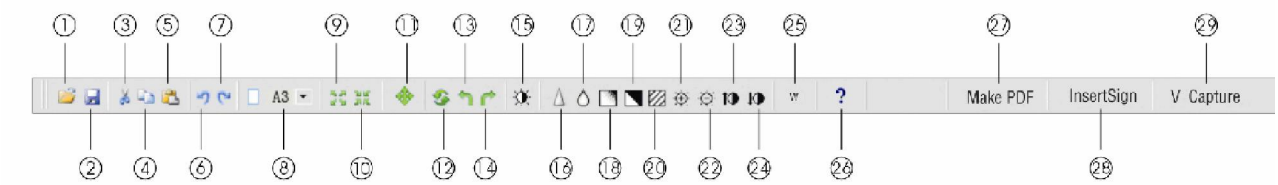

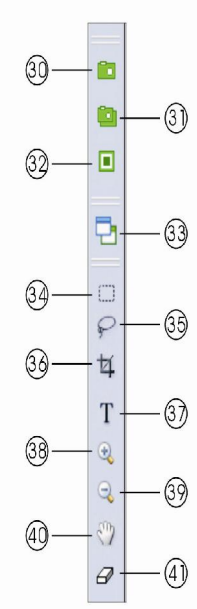

1->Open	2->Save	3->Cut
4->Copy	5->Paste	6->Undo
7->Redo	8->Picture Size	9->Actual Size
10->Frame Size	11->Full screen	12->Rotate
13->Rotate Left 90	14->Rotate Right 90	15->Video Attribute
16->Sharpen	17->Soften	18->Gray Scale
19->Threshold	20->Ground Color Removal	21->Lighten
22->Darken	23->More Contrast	24->Less Contrast
25->OCR	26->Help	27->Make PDF
28->Insert Signature	29->Video Capture	30->Snapshot
31->Time Snapshot	32->Stop Capture	33->Dynamic or Static
34->Rect Select	35->Free Select	36->Cut Out
37->Text	38->Larger	39->Smaller
40->Move	41->Eraser	

Chapter IV Common problems and use skills

1、 How to copy a book?

Answer：Please set up interval of scanning in dialog box, preserve the name of files and path. Then choose optional scanning, this is convenient to copy a book. If you want to make a PDF document in order to read easily, please refer to the sixth.

2、 How to add words to scanned photos?

Answer：Click Edit-Text, with left-button-click in the edit area to get edit box. Input words in edit box. To finish enter, you just need to click outside of the edit box.

3、 How to edit text files?

Answer： After scanning the files that need to edit, make recognition of it, you can edit it in the recognized dialog frame, also edit it by sending to Word

4、 How to produce PDF files?

Answer： Choose Make PDF and open plug-in. As follows：

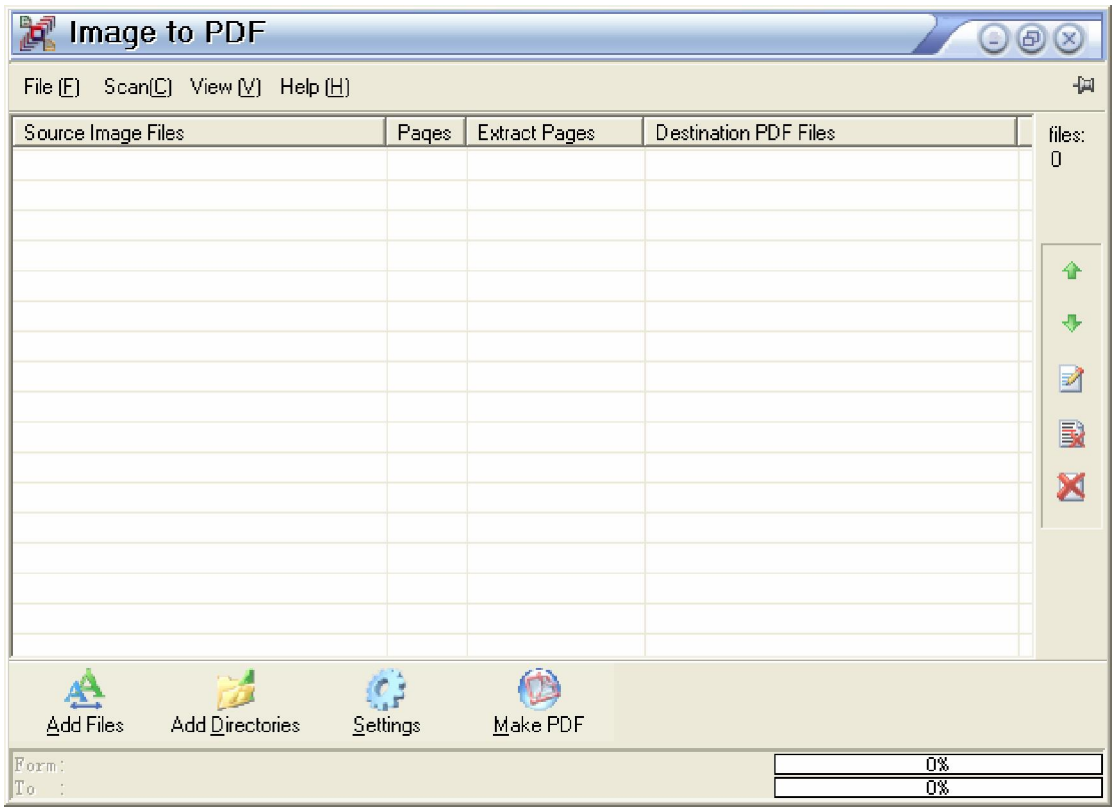

（1） Switch one or some images into corresponding PDF documents

- Choose ADD Files, left-click the Mouse to choose the files what you want to switch.
- Choose “settings” and left- click the Mouse to choose “Convert one file to one PDF file”.
- Choose “Make PDF”.

（2） Some images turn into a PDF document

- Choose ADD Files, left-click and choose the files what you want to switch.
- Choose “settings” and left- click the Mouse to choose “Convert one file to one PDF

file”

- Choose “Make PDF”

（3） Convert a document folder to a PDF document

- Choose ADD Directories, Left-click “ADD Directories”, choose the Directories what you want to switch.
- Choose “settings” and left- click the Mouse to choose “Convert one directories to one PDF file”.
- Choose “Make PDF”

5、 How to use print（1:1）rightly?

Answer: this facility has three heights to scan, so it needs to choose the right height when you want to print. And at the same time, the picture you want to print must be got from this facility.

6、 How to copy document with print (1:1)?

Answer：

To get the best result, suggest the follow steps:

First, confirm that environment light is enough and adjust camera to its most clear-cut state.

Second, adjust video light, contrast and so on to get the right state.

Third, crop the redundant edge of the video.

Forth, dispose the picture with ground color removal and threshold. And eraser can be used here also.

Fifth, set print (1:1) height (refer to 5), print preview, print.

7、 How to use OCR?

Answer：You must install OCR software before the function can be implemented.

8、 How to raise the recognition rate of OCR?

Answer： It lies in the contrast and clear degree for words and background. Under this circumstance, it comes to 95%, and ensures the following factors：

1、 Crop part images with words

2、 Ensure the words not to incline {if inclined, please rotate the photographs}

3、 Adjust the properties of video to raise the clear degree when scanning.

Chapter V Errors, solutions and notes

Error1. The software can not be opened

Solutions

1. Look through whether the hardware is attached with business scanner.
2. Look through whether the USB cable by two sides is natural.
3. Open AMCAP to see whether the image is natural.
4. Right-click "my computer", choose in pop-up menu: management--setting management--image processing device. If it is not displayed with "CH200" but "USB video device" in "image processing device", then click right Mouse, choose "renew driver"

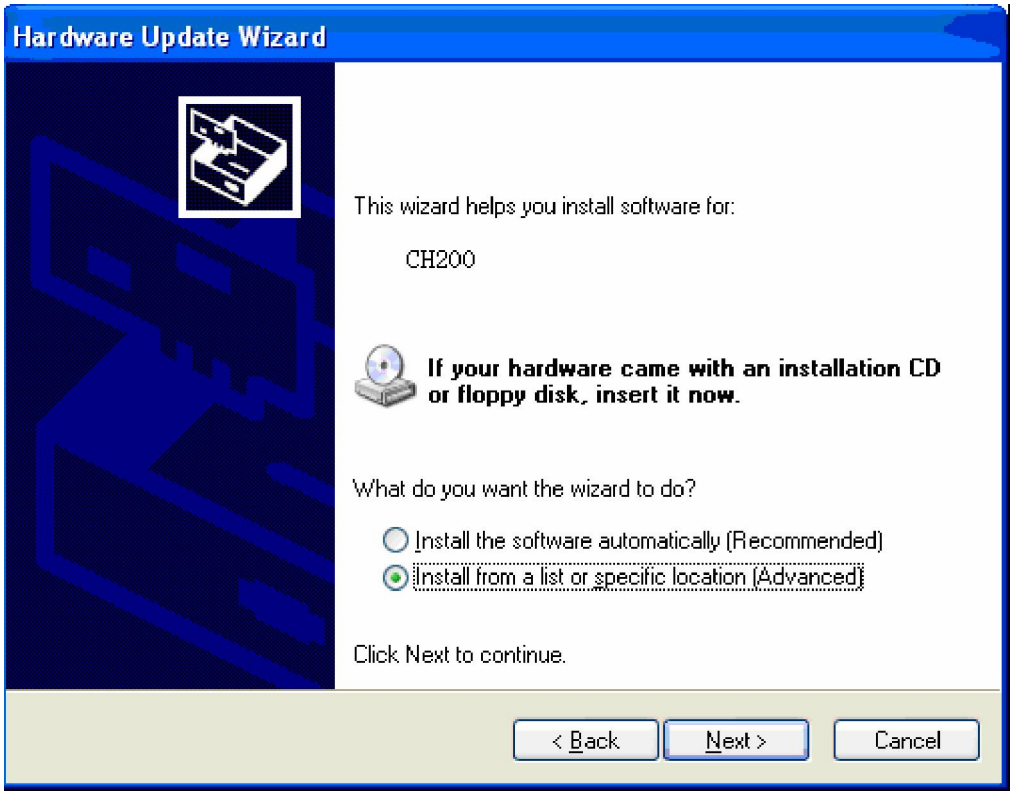
Hardware Update Wizard
This wizard helps you install software for:
CH200
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

Choose from " install form a list or specific location [Advanced]", click "Next"

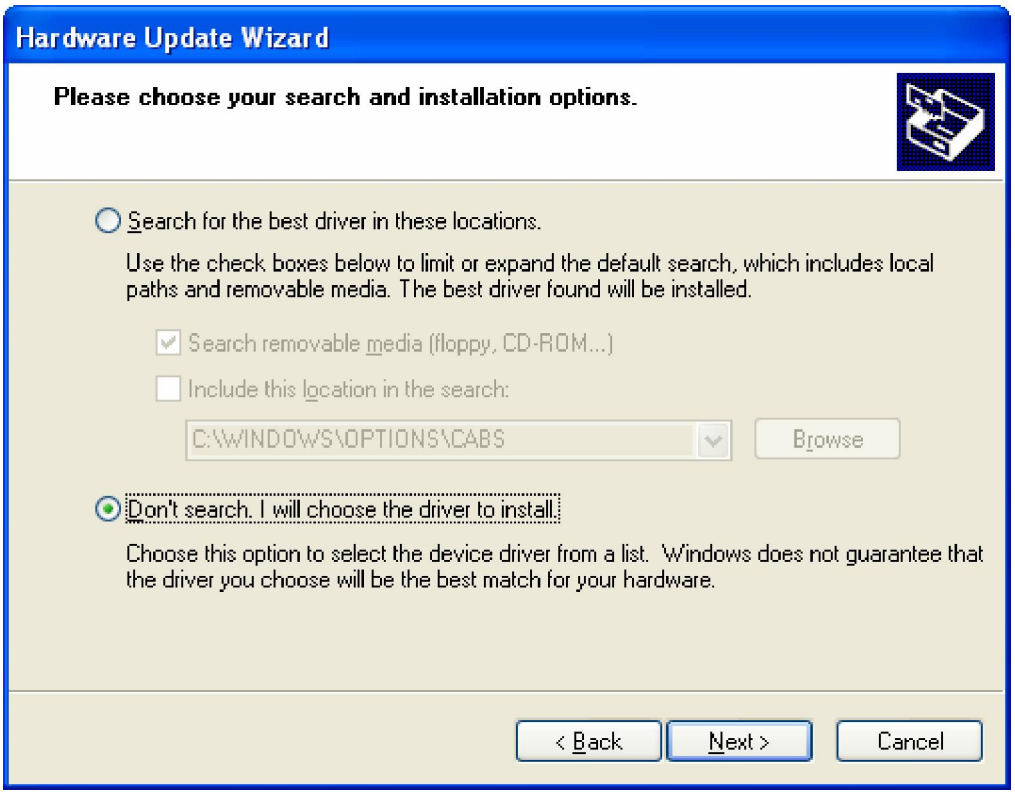
Hardware Update Wizard
Please choose your search and installation options.
Search for the best driver in these locations.
Use the check boxes below to limit or expand the default search, which includes local paths and removable media. The best driver found will be installed.
Search removable media (floppy, CD-ROM...)
Include this location in the search:
C:\WINDOWS\OPTIONS\CABS
Browse
Don't search. I will choose the driver to install.
Choose this option to select the device driver from a list. Windows does not guarantee that the driver you choose will be the best match for your hardware.
< Back
Next >
Cancel

Choose "Don't search, I will choose the driver to install" in pop-up dialog box, then click "Next"

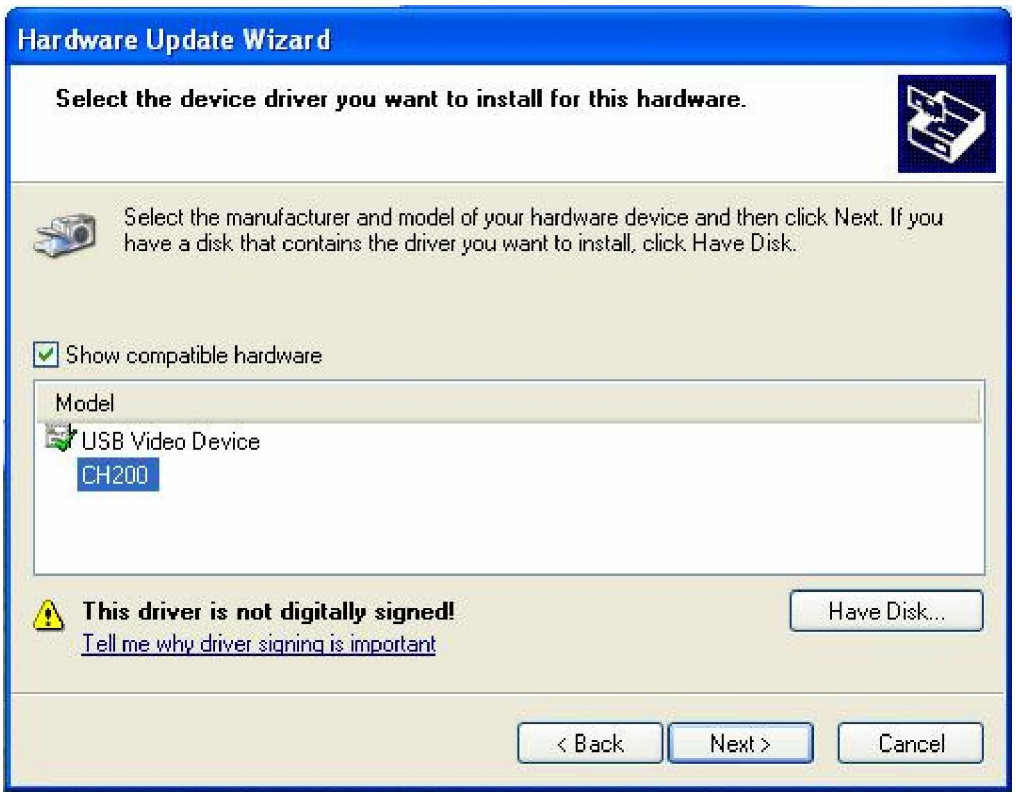
Hardware Update Wizard
Select the device driver you want to install for this hardware.
Select the manufacturer and model of your hardware device and then click Next. If you have a disk that contains the driver you want to install, click Have Disk.
Show compatible hardware
Model
USB Video Device
CH200
This driver is not digitally signed!
Tell me why driver signing is important
Have Disk...
< Back
Next >
Cancel

Choose "CH200" in model list, then click "Next".

With the following form, choose "continue anyway".

Hardware Installation
The software you are installing for this hardware:
CH200
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

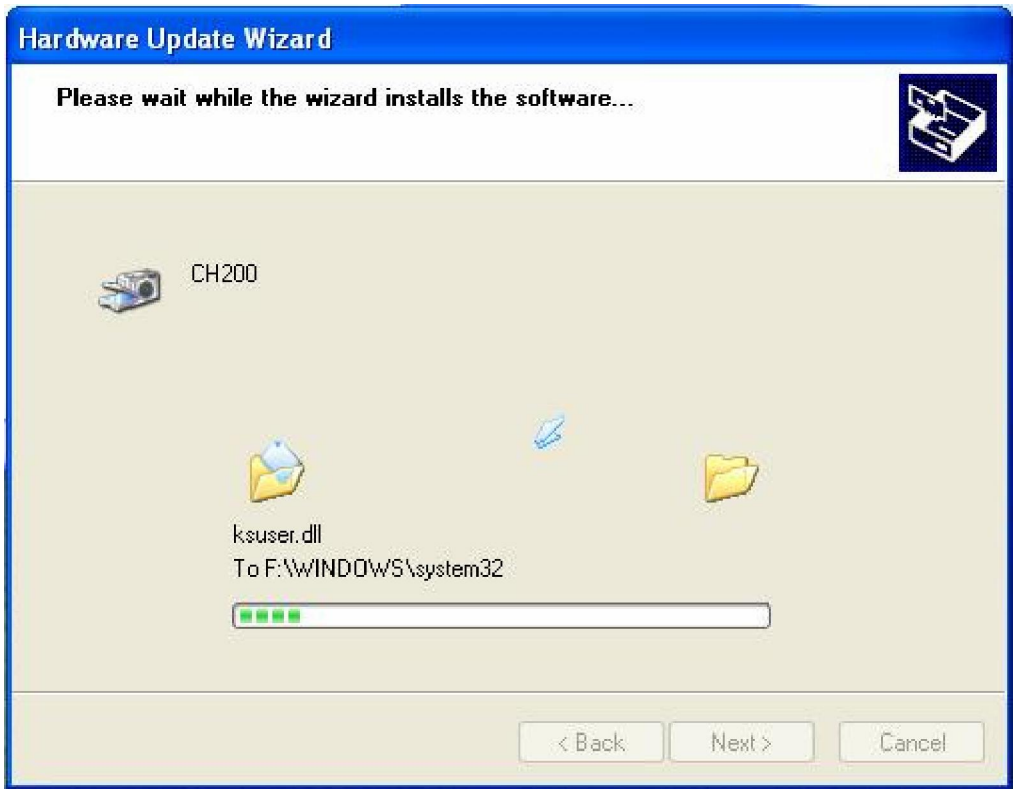

Drive is update automatically.

Hardware Update Wizard
Completing the Hardware Update Wizard
The wizard has finished installing the software for:
CH200
The hardware you installed will not work until you restart your computer.
Click Finish to close the wizard.
< Back
Finish
Cancel

Choose “finish” to finish update.

Error2. Stop in the following interface during installing driver

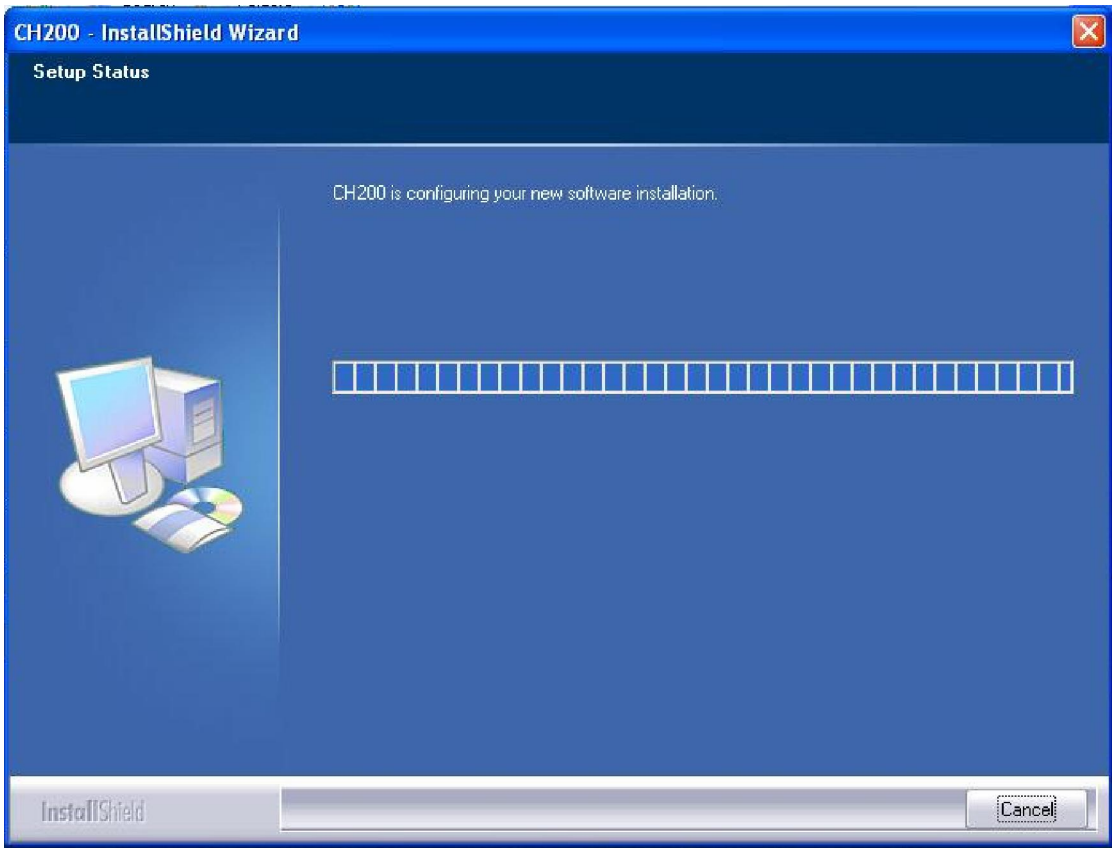

Solutions

Maybe the reason is that Windows confirmed and conceal behind this interface. The resolution is to drag the interface with Mouse, choose “Continue Anyway” after coming following interface.

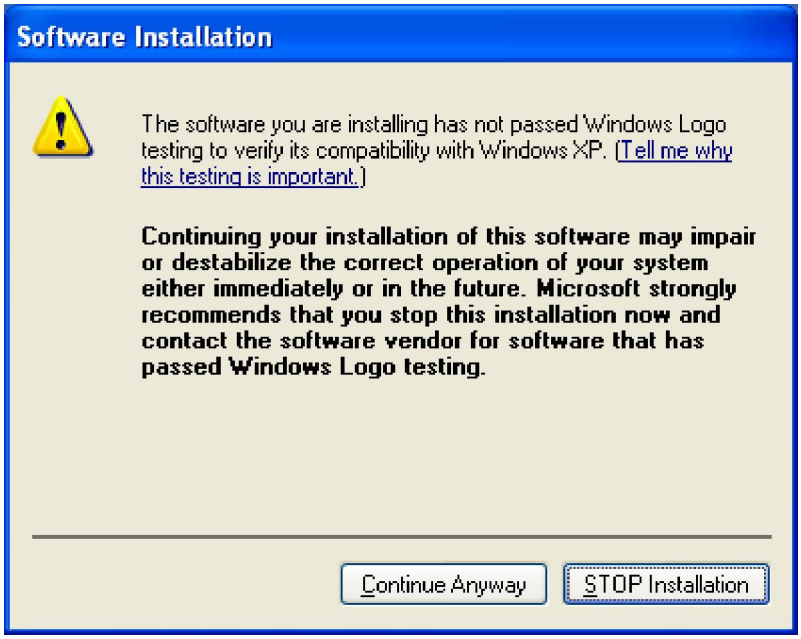
Software Installation
The software you are installing has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the software vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

Notes: The USB connector should be the one that install driver.